


## FEATURES & BENEFITS

- flexible thin-walled heat shrinkable tubes with round profile
- good insulating properties
- UV resistant and halogen free
- suitable for thermal transfer printing for LETATWIN printers

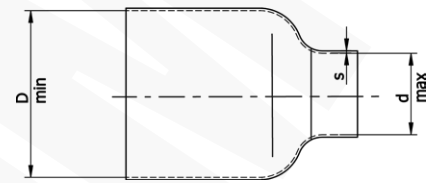

## APPLICATION

### MECHANICAL DATA

Material	cross-linked polyolefin
Halogen-free	yes
UV Resistance	yes
Recommended shrinking temperature [°C]	>90
Operating temperature [°C]	-55 ÷ +105
Shrinkage factor	2:1

### ELECTRICAL DATA

Breakdown strength [kV/mm]	20
----------------------------	----

### CERTIFICATES & STANDARDS

Flammability class	ASTM D 635-HB
Standards	PN-EN 45545-2:2013+A1:2015 - made of material that meets standard requirements with regard to generation of smoke and toxic substances for requirements: R22-HL1, HL2, HL3

### NOTE!

Type	Index Ergom	Colour	Inside diameter on delivery D [mm]	Inside diameter in full shrinkage d [mm]	Wall thickness on full shrinkage - s [mm]	Quantity in package [m]
TCRA 2,5/1,2 BK (100 M)	E05ME-01010500101	black	2,5	1,2	0,43	100
TCRA 2,5/1,2 YL (100 M)	E05ME-01010500201	yellow	2,5	1,2	0,43	100
TCRA 2,5/1,2 WT (100 M)	E05ME-01010500301	white	2,5	1,2	0,43	100
TCRA 3,6/1,6 BK (100 M)	E05ME-01010501101	black	3,6	1,6	0,55	100
TCRA 3,6/1,6 YL (100 M)	E05ME-01010501201	yellow	3,6	1,6	0,55	100
TCRA 3,6/1,6 WT (100 M)	E05ME-01010501301	white	3,6	1,6	0,55	100
TCRA 5,2/2,4 BK (100 M)	E05ME-01010502101	black	5,2	2,4	0,55	100
TCRA 5,2/2,4 YL (100 M)	E05ME-01010502201	yellow	5,2	2,4	0,55	100
TCRA 5,2/2,4 WT (100 M)	E05ME-01010502301	white	5,2	2,4	0,55	100
TCRA 6,7/3,2 BK (100 M)	E05ME-01010503101	black	6,7	3,2	0,65	100
TCRA 6,7/3,2 YL (100 M)	E05ME-01010503201	yellow	6,7	3,2	0,65	100
TCRA 6,7/3,2 WT (100 M)	E05ME-01010503301	white	6,7	3,2	0,65	100
TCRA 10/4,8 BK (150 M)	E05ME-01010504101	black	10,0	4,8	0,65	150
TCRA 10/4,8 YL (150 M)	E05ME-01010504201	yellow	10,0	4,8	0,65	150
TCRA 10/4,8 WT (150 M)	E05ME-01010504301	white	10,0	4,8	0,65	150
TCRA 13,6/6,4 BK (100 M)	E05ME-01010505101	black	13,6	6,4	0,65	100
TCRA 13,6/6,4 YL (100 M)	E05ME-01010505201	yellow	13,6	6,4	0,65	100

Type	Index Ergom	Colour	Inside diameter on delivery D [mm]	Inside diameter in full shrinkage d [mm]	Wall thickness on full shrinkage - s [mm]	Quantity in package [m]
TCRA 13,6/6,4 WT (100 M)	E05ME-01010505301	white	13,6	6,4	0,65	100
TCRA 20,4/9,5 BK (50 M)	E05ME-01010506101	black	20,4	9,5	0,70	50
TCRA 20,4/9,5 YL (50 M)	E05ME-01010506201	yellow	20,4	9,5	0,70	50
TCRA 20,4/9,5 WT (50 M)	E05ME-01010506301	white	20,4	9,5	0,70	50
TCRA 27/12,7 BK (50 M)	E05ME-01010507101	black	26,5	12,7	0,85	50
TCRA 27/12,7 YL (50 M)	E05ME-01010507201	yellow	26,5	12,7	0,85	50
TCRA 27/12,7 WT (50 M)	E05ME-01010507301	white	26,5	12,7	0,85	50
TCRA 40/19,1 BK (50 M)	E05ME-01010508101	black	39,5	19,1	0,90	50
TCRA 40/19,1 YL (50 M)	E05ME-01010508201	yellow	39,5	19,1	0,90	50
TCRA 40/19,1 WT (50 M)	E05ME-01010508301	white	39,5	19,1	0,90	50
TCRA 50,8/25,4 BK (50 M)	E05ME-01010509101	black	50,8	25,4	0,90	50
TCRA 50,8/25,4 YL (50 M)	E05ME-01010509201	yellow	50,8	25,4	0,90	50
TCRA 50,8/25,4 WT (50 M)	E05ME-01010509301	white	50,8	25,4	0,90	50