




## FEATURES & BENEFITS

-  very good mechanical properties (protect cables against damages and vibrations)
-  high flexibility
-  simple and quick assembly

## APPLICATION

Cable harness forming - dedicated to the railway industry and not only.

## MECHANICAL DATA


Material	Polyester
Halogen-free	yes
Colour	black
Operating temperature [°C]	-50 ÷ 150
Melting-point [°C]	230

## CERTIFICATES & STANDARDS

Flammability class	the product meets the requirements of R22-R23 for the HL1 - HL2 - HL3 hazard levels in accordance with EN 45545-2:2013+A1:2015
Standards	EN 45545-2:2013+A1:2015

## NOTE!

We offer hot cutting tool NE type.

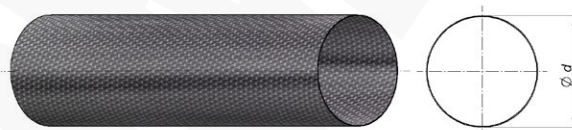

Type	Index Ergom	Nominal diameter of sleeving d [mm]	Max. diameter of cable harness d <sub>min</sub> [mm]	Quantity in package [m]
OTS 4 (200 M)	E05ME-03010700101	4	6	200
OTS 6 (200 M)	E05ME-03010700301	6	9	200
OTS 8 (200 M)	E05ME-03010700401	8	12	200
OTS 10 (200 M)	E05ME-03010700501	10	17	200
OTS 12 (200 M)	E05ME-03010700601	12	18	200
OTS 16 (200 M)	E05ME-03010700701	16	22	200
OTS 20 (100 M)	E05ME-03010700801	20	30	100
OTS 25 (100 M)	E05ME-03010700901	25	33	100
OTS 30 (100 M)	E05ME-03010701001	30	50	100
OTS 40 (50 M)	E05ME-03010701101	40	55	50
OTS 50 (50 M)	E05ME-03010701201	50	75	50

