

FEATURES & BENEFITS


- sheet metal edge shields in enclosures at wire and cable routing points
- protects wire insulation from damage by easily adapting to the protected edge shape, e.g. in opening, due to stresses
- for a wide range of enclosure wall thickness

LOGISTIC DATA

Quantity in package [m] 50

MECHANICAL DATA

Material	PCV resistant to typical solvents, lubricants, oils, sea water, moulds etc.
Operating temperature [°C]	-30 ÷ +70
Assembly temperature [°C]	-5 ÷ +35
Colour	black

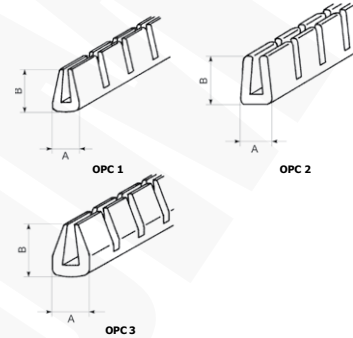

Type	Index Ergom	Min. bending radius [mm]	Metal plate thickness [mm]	A	B
OPC-1 (50 M)	E01PK-01060200100	45	0,4+1,3	5,0	9,0
OPC-2 (50 M)	E01PK-01060200200	55	1,3+2,2	6,5	9,5
OPC-3 (50 M)	E01PK-01060200300	65	2,2+3,3	7,5	11,0

