
## Cable ties, TKZD type

| cable ties facilitating fasteni   | ng to enclosures and easy loosening          |   |
|---|--|---|
| for indoor use  |  |   |
| $\overline{\mathbf{A}}$   |  | _ |
|   |  |   |
| OGISTIC DATA  |  |   |
| Quantity in package [pcs]   | 100  | _ |
|   |  | _ |
| MECHANICAL DATA<br>Material   | polyamide 6.6                                | _ |
|   | polyamide 6.6<br>yes                         | - |
| Material  |  |   |
| Material<br>Halogen-free  | yes  |   |
| Material<br>Halogen-free<br>Colour  | yes<br>natural (bright)                      |   |
| Material<br>Halogen-free<br>Colour<br>Dperating temperature [°C]  | yes<br>natural (bright)<br>-40 ÷ +85         |   |
| Material<br>Halogen-free<br>Colour<br>Operating temperature [°C]<br>Short-term temperature [°C]<br>Minimum installation temperature | yes<br>natural (bright)<br>-40 ÷ +85<br>+110 |   |






## **CERTIFICATES & STANDARDS**

| Flammability class | UL 94 V2 |
|--------------------|----------|
| Standards          | EN 62275 |

| Туре                | Index Ergom       | Tensile strength, min. [daN] | Max. bundle dia. [mm] | L   | w   |
|---------------------|-------------------|------------------------------|-----------------------|-----|-----|
| TKZD 20/5 (100 PCS) | E01TK-01060200101 | 20                           | 48                    | 210 | 4,5 |
| TKZD 14/8 (100 PCS) | E01TK-01060200201 | 22                           | 36                    | 150 | 8   |
| TKZD 16/8 (100 PCS) | E01TK-01060200301 | 22                           | 38                    | 165 | 8   |

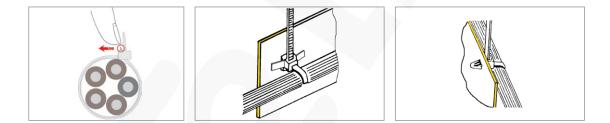

Graphic project, pictures and all technical data and descriptions in this catalogue are protected by Polish and international copyright laws. Names and logos used in the content of this catalogue may be trademarks, for which ZAE Ergom Sp. z o.o. has exclusive protection rights. ZAE ERGOM reserves the right for changes in the assortment and parameters of its products.



www.ergom.com