

Thin-walled flexible heat shrink tubes in rolls, TCREL BOX type

FEATURES & BENEFITS



convenient to use heat-shrink tubes in rolls; practical solution for servicing



flexible and economical

LOGISTIC DATA

Quantity in package [pcs] 1

MECHANICAL DATA

Material cross-linked polyolefin

Recommended shrinking temperature [°C] 70 ÷ 125

Operating temperature [°C] -55 ÷ +125


Colour black

ELECTRICAL DATA

Breakdown strength [kV/mm] >15

CERTIFICATES & STANDARDS

Flammability class VW-1 in accordance with UL224

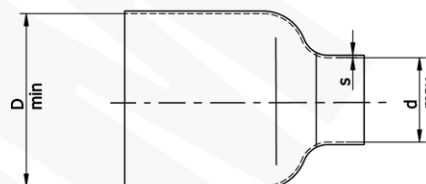

Type	Index Ergom	Halogen-free	Shrinkage factor	Inside diameter on delivery D [mm]	Inside diameter in full shrinkage d [mm]	Wall thickness on full shrinkage - s [mm]	Length [m]
TCREL BOX 1,6/0,8 BK	E05ME-01120000101	yes	2:1	1,6	0,8	0,33	15
TCREL BOX 2,4/1,2 BK	E05ME-01120000201			2,4	1,2	0,44	
TCREL BOX 3,2/1,6 BK	E05ME-01120000301			3,2	1,6		
TCREL BOX 4/1 BK	E05ME-01120000351	no	4:1	4	1	0,75	10
TCREL BOX 4,8/2,4 BK	E05ME-01120000401	yes	2:1	4,8	2,4	0,50	10
TCREL BOX 6/1,5 BK	E05ME-01120000451	no	4:1	6	1,5	0,83	8
TCREL BOX 6,4/3,2 BK	E05ME-01120000501	yes	2:1	6,4	3,2	0,56	10
TCREL BOX 8/2 BK	E05ME-01120000551	no	4:1	8	2	0,95	8
TCREL BOX 9,5/4,8 BK	E05ME-01120000601	yes	2:1	9,5	4,8	0,56	10
TCREL BOX 10/2,5 BK	E05ME-01120000651	no	4:1	10	2,5	1,08	8
TCREL BOX 12/3 BK	E05ME-01120000671			12	3	1,1	
TCREL BOX 12,7/6,4 BK	E05ME-01120000701	yes	2:1	12,7	6,4	0,68	8
TCREL BOX 16/4 BK	E05ME-01120000751	no	4:1	16	4	1,1	8
TCREL BOX 19/4,6 BK	E05ME-01120000771			19	4,6	1,4	6
TCREL BOX 19/9,5 BK	E05ME-01120000801	yes	2:1	19	9,5	0,78	7
TCREL BOX 25,4/6,5 BK	E05ME-01120000851	no	4:1	25,4	6,5	1,35	6
TCREL BOX 25,4/12,7 BK	E05ME-01120000901	yes	2:1	25,4	12,7	0,90	4