

FEATURES & BENEFITS



popular holders for flush-mounted electric systems




particularly useful for brick and aerated concrete walls

MECHANICAL DATA

Material	copolymer PE + PP
Operating temperature [°C]	-30 ÷ +70
Colour	white
Mounting hole d [mm]	7

NOTE!

Mounting hole diameter, depending on the substrate type, must be adjusted to the fixture.

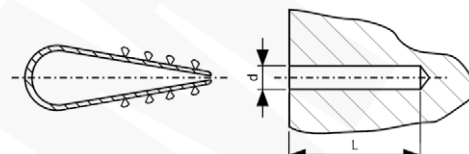

Type	Index Ergom	Cable external diameter [mm]	Mounting hole L [mm]	Quantity in package [pcs]
UZP 1 (100 PCS)	E01UI-01050100101	max. 6	40	100
UZP 2 (50 PCS)	E01UI-01050200101	6 ÷ 10	50	50