

# Fully insulated receptacles, GCI...PCV

## FEATURES & BENEFITS


- socket with long PVC insulating sleeve, with long Cu sleeve inside, for double crimping
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

## LOGISTIC DATA

Quantity in package [pcs] 100

## MECHANICAL DATA

Insulation polyvinyl chloride (PCV)  
 Material brass  
 Surface tin-plated  
 Operating temperature [°C] -5 ÷ +60

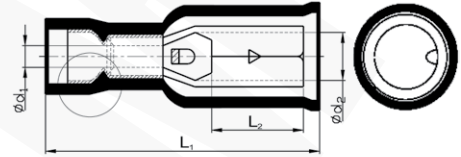

| Type                    | Index Ergom       | Cross-section [mm <sup>2</sup> ] | Insulation colour | L <sub>1</sub> | L <sub>2</sub> | d <sub>1</sub> | d <sub>2</sub> | Weight [kg] |
|-------------------------|-------------------|----------------------------------|-------------------|----------------|----------------|----------------|----------------|-------------|
| GCI 1/4 PCV (100 PCS)   | E10KN-03030300101 | 0,75+1                           | red               | 25,0           | 7,3            | 1,7            | 3,9            | 0,11        |
| GCI 2,5/4 PCV (100 PCS) | E10KN-03030300201 | 1,5+2,5                          | blue              | 25,0           | 7,3            | 2,3            | 3,9            | 0,13        |
| GCI 2,5/5 PCV (100 PCS) | E10KN-03030300301 |                                  |                   |                | 8,5            |                | 4,9            |             |
| GCI 6/5 PCV (100 PCS)   | E10KN-03030300401 | 4+6                              | yellow            | 28,0           | 8,5            | 3,4            | 4,9            | 0,21        |