

Insulated receptacles, GI type

FEATURES & BENEFITS


- ☒ receptacle with polyamide insulating sleeve, with Cu sleeve inside, for double crimping
- ☒ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk, facilitates cable installation
- ☒ sleeve colours facilitate cross-section identification
- ☒ to operate in wider temperature ranges than terminals with PVC insulation

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyamide 6.6
Material brass
Surface tin-plated
Operating temperature [°C] -30 ÷ +95

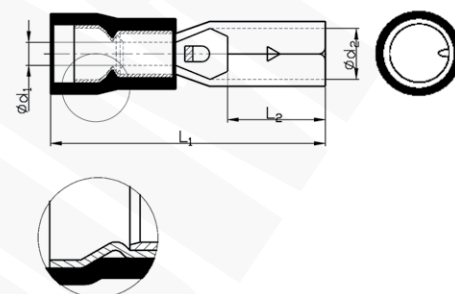

EAC

Type	Index Ergom	Cross-section [mm²]	Insulation colour	L ₁	L ₂	d ₁	d ₂	Weight [kg]
GI 1/4 (100 PCS)	E10KN-03030100101	0,75÷1	red	22,5	7,3	1,8	3,9	0,1
GI 2,5/4 (100 PCS)	E10KN-03030100201	1,5÷2,5	blue	22,5	7,3	2,4	3,9	0,14
GI 2,5/5 (100 PCS)	E10KN-03030100301				7,0		4,9	0,15
GI 6/5 (100 PCS)	E10KN-03030100401	4÷6	yellow	24,5	7,0	3,5	4,9	0,18