

# Insulated receptacles, GI...PCV type

## FEATURES & BENEFITS

- ✓ receptacle with PVC insulating sleeve, with Cu sleeve inside, for double crimping
- ✓ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- ✓ sleeve colours facilitate cross-section identification

## LOGISTIC DATA


Quantity in package [pcs] 100

## MECHANICAL DATA

Insulation polyvinyl chloride (PVC)  
 Material brass  
 Surface tin-plated  
 Operating temperature [°C] -5 ÷ +60

## DIMENSIONS

L<sub>2</sub> 7,0

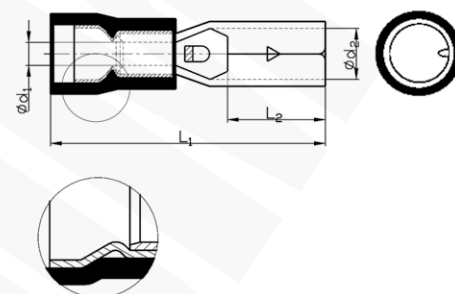

Type	Index Ergom	Cross-section [mm²]	Insulation colour	L <sub>1</sub>	d <sub>1</sub>	d <sub>2</sub>	Weight [kg]
GI 1/4 PCV (100 PCS)	E10KN-03030100901	0,75+1	red	22,5	1,8	3,9	0,1
GI 2,5/4 PCV (100 PCS)	E10KN-03030101001	1,5+2,5	blue	22,5	2,4	3,9	0,14
GI 2,5/5 PCV (100 PCS)	E10KN-03030101101					4,9	0,15
GI 6/5 PCV (100 PCS)	E10KN-03030101201	4+6	yellow	24,5	3,5	4,9	0,18