

Aluminium thick-walled tubular cable lugs, KA type

FEATURES & BENEFITS

- ☒ thick-walled ring cable lug Al
- ☒ design not recommended for new installations
- ☒ does not contain grease ensuring gas-tight connection in crimped part - grease available separately
- ☒ description of cable cross-section and cable lug size on palm surface

MECHANICAL DATA


Material	Al
Surface	uncoated

CERTIFICATES & STANDARDS

Design	thick-walled
--------	--------------

NOTE!

Sector shaped conductors (sm) must be rounded with special dies.

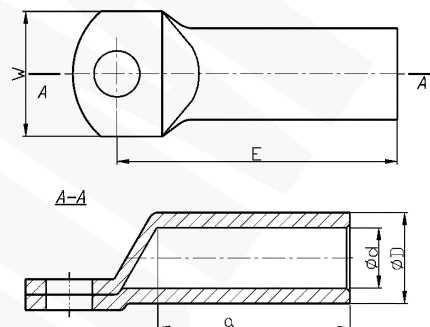

Type	Index Ergom	Cross-section, Al rm/sm [mm ²]	Cross-section, Al re/se [mm ²]	d	D	a	E	W	Screw hole	Socket code no.	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
KA 16/6 (100 PCS)	E12KA-01040100100	16	25	5,2	12,6	36	56	20	M6	13	2	4	100	1,8
KA 16/8 (100 PCS)	E12KA-01040100200						59		M8					
KA 16/10 (100 PCS)	E12KA-01040100300								M10					1,9
KA 25/6 (100 PCS)	E12KA-01040100400	25	35	6,1	13,8	38	61		M6	14	2	4	100	2,3
KA 25/8 (100 PCS)	E12KA-01040100500								M8					2,4
KA 25/10 (100 PCS)	E12KA-01040100600						64		M10					2,35
KA 25/12 (100 PCS)	E12KA-01040100700								M12					3,4
KA 35/6 (100 PCS)	E12KA-01040100800	35	50	7,2	16,2	41	66		M6	16	2	5	100	3
KA 35/8 (100 PCS)	E12KA-01040100900								M8					3,15
KA 35/10 (100 PCS)	E12KA-01040101000						69	24	M10					3,4
KA 35/12 (100 PCS)	E12KA-01040101100								M12					3,5
KA 35/16 (100 PCS)	E12KA-01040101300						72		M16					4,3
KA 50/8 (100 PCS)	E12KA-01040101400	50	70	9,0	18,2	45	73		M8	18	2	5	100	4,1
KA 50/10 (100 PCS)	E12KA-01040101500						76	26	M10					4,5
KA 50/16 (100 PCS)	E12KA-01040101800						79		M16					5,95
KA 70/8 (100 PCS)	E12KA-01040101900	70	95	12,5	22,6	52	83		M8	20	3	6	100	6,4
KA 70/10 (100 PCS)	E12KA-01040102000								M10					6,3
KA 70/12 (100 PCS)	E12KA-01040102100						86	28	M12					6,55
KA 70/14 (100 PCS)	E12KA-01040102200								M14					6,4
KA 70/16 (100 PCS)	E12KA-01040102300						89		M16					3,92
KA 95/10 (50 PCS)	E12KA-01040102400	95	120	13,9	25,8	57	91		M10	22	3	6	50	3,82
KA 95/12 (50 PCS)	E12KA-01040102500								M12					3,75
KA 95/14 (50 PCS)	E12KA-01040102600						94	31	M14					3,95
KA 95/16 (50 PCS)	E12KA-01040102700								M16					

Type	Index Ergom	Cross-section, Al rm/sm [mm ²]	Cross-section, Al re/se [mm ²]	d	D	a	E	W	Screw hole	Socket code no.	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
KA 120/10 (50 PCS)	E12KA-01040102800	120	150	15,5	28,0	61	96	37	M10	25	3	7	50	5,5
KA 120/12 (50 PCS)	E12KA-01040102900								M12					
KA 120/14 (50 PCS)	E12KA-01040103000								M14					5,3
KA 120/16 (50 PCS)	E12KA-01040103100								M16					
KA 120/20 (50 PCS)	E12KA-01040103200								M20					5,8
KA 150/10 (50 PCS)	E12KA-01040103300	150	185	17,8	30,0	60	98	41	M10	28	3	7	50	6,3
KA 150/12 (50 PCS)	E12KA-01040103400								M12					
KA 150/14 (50 PCS)	E12KA-01040103500								M14					6,2
KA 150/16 (50 PCS)	E12KA-01040103600								M16					6,45
KA 150/20 (50 PCS)	E12KA-01040103700								M20					6,65
KA 185/12 (50 PCS)	E12KA-01040103800	185	240	19,8	34,0	70	115	43	M12	30	3	7	50	7,7
KA 185/14 (50 PCS)	E12KA-01040103900								M14					8,2
KA 185/16 (50 PCS)	E12KA-01040104000								M16					7,8
KA 185/20 (50 PCS)	E12KA-01040104100	185	240	17,8	30,0	70	123	43	M20	30	3	7	50	8,3
KA 240/12 (50 PCS)	E12KA-01040104200	240	300						M12					10,15
KA 240/14 (50 PCS)	E12KA-01040104300	240	300	19,8	34,0	67	117	49	M14	34	3	8	50	10,5
KA 240/16 (50 PCS)	E12KA-01040104400								M16					
KA 240/20 (50 PCS)	E12KA-01040104500								M20					10,3

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow