

# Tubular terminals for 2 bolts with adjustable spacing KDR.../2x12 (45-60)

## FEATURES & BENEFITS

- two-ring terminal Cu, crimped part as per DIN, with galvanic tin plating
- shape of the holes allows terminal to be screwed on distance between bolts 45 - 60 mm
- description of cable cross-section, terminal size and crimping die number on crimped part surface

## LOGISTIC DATA

Quantity in package [pcs] 1

## MECHANICAL DATA

Material Cu  
 Surface tin-plated  
 Screw hole M12

## CRIMPING SHAPE

Number of crimping - wide 2

## DIMENSIONS


C 45 - 60  
 $C_1$  14  
 $W_1$  13

## CERTIFICATES & STANDARDS

Design DIN 46235 – concerns only the tubular part

## NOTE!

- sector-shaped conductors (sm) must be "rounded";
- use tools as for KDR terminals.

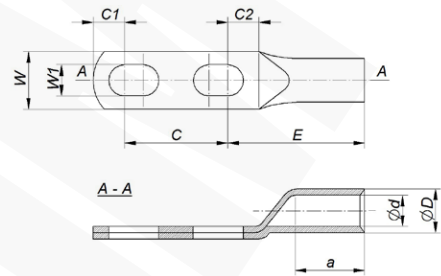

Type	Index Ergom	Cross-section [mm <sup>2</sup> ]	d	D	a	$C_2$	E	W	Socket code no.	Lz/w
KDR 70/2x12 (45-60)	E11KM-02020203200	70	11,5	16,5	28	14	55	24	16	3
KDR 95/2x12 (45-60)	E11KM-02020203400	95	13,5	19	35	16	65	28	18	4
KDR 120/2x12 (45-60)	E11KM-02020203500	120	15,5	21	35	20	70	32	20	4
KDR 150/2x12 (45-60)	E11KM-02020203600	150	17	23,5	40	20	78	34	22	4
KDR 185/2x12 (45-60)	E11KM-02020203700	185	19	25,5	42	20	82	37	25	5
KDR 240/2x12 (45-60)	E11KM-02020203800	240	21	29	42	26	92	42	28	5

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow