

# “Butt splice” connectors in heat-shrink insulation, KLIT type

## FEATURES & BENEFITS

- connector Cu, with heat-shrink insulating sleeve, to make “butt splice” cable connections
- heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

## LOGISTIC DATA

Quantity in package [pcs] 100

## MECHANICAL DATA

Insulation heat-shrink sleeve

Material Cu


Surface tin-plated

Operating temperature [°C] -55 + +125

Shrink temperature [°C] > 120

## DIMENSIONS

$s_2$  0,6

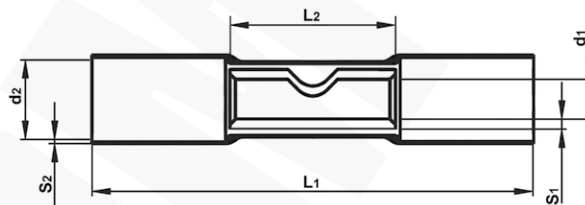

**EAC**

Type	Index Ergom	Cross-section [mm <sup>2</sup> ]	Insulation colour	L <sub>1</sub>	L <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	s <sub>1</sub>	Weight [kg]
KLIT 0,5 (100 PCS)	E09KO-02070100051	0,2+0,5	transparent	28	12	1,2	3,2	0,4	0,04
KLIT 1 (100 PCS)	E09KO-02070100101	0,75+1,0	red	35	15	1,8	4,8	0,8	0,11
KLIT 2,5 (100 PCS)	E09KO-02070100201	1,5+2,5	blue	35	15	2,3	6,0	0,8	0,14
KLIT 6 (100 PCS)	E09KO-02070100301	4+6	yellow	41	15	3,5	7,2	0,9	0,23