

Tubular thick-walled cable connectors, KLA type

FEATURES & BENEFITS

- ☒ thick-walled connector Al, to make "butt splice" cable connections
- ☒ design not recommended for new installations
- ☒ does not contain grease ensuring gas-tight connection in crimped part - grease available separately
- ☒ not mechanically loaded

MECHANICAL DATA


Material	Al
Surface	uncoated

CERTIFICATES & STANDARDS

Design	thick-walled
--------	--------------

NOTE!

Sector shaped conductors (sm) must be rounded with special dies.

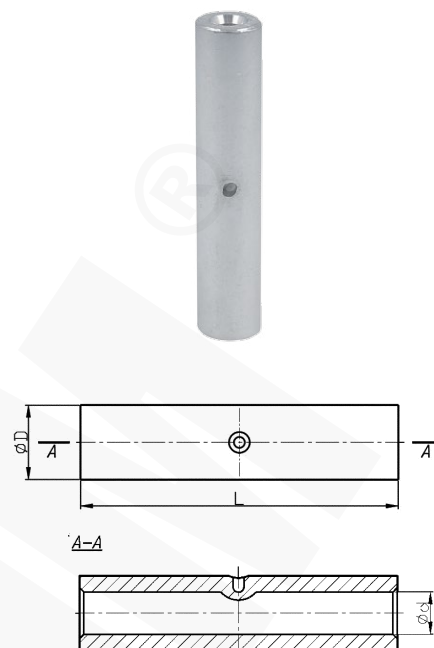

Type	Index Ergom	Cross-section, re/se [mm²]	Cross-section, rm/sm [mm²]	d	D	L	Socket code no.	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
KLA 16 (100 PCS)	E12KA-01060100100	25	16	5,2	12,6	62	13	2-2	4-4	100	1,7
KLA 25 (100 PCS)	E12KA-01060100200	35	25	6,4	13,8	68	14	2-2	4-4	100	2,2
KLA 35 (100 PCS)	E12KA-01060100300	50	35	7,6	16,2	78	16	2-2	5-5	100	3,5
KLA 70 (100 PCS)	E12KA-01060100500	95	70	10,6	20,2	96	20	3-3	6-6	100	6,3
KLA 95 (50 PCS)	E12KA-01060100600	120	95	12,8	22,6	110	22	3-3	7-7	50	4,3
KLA 120 (50 PCS)	E12KA-01060100700	150	120	13,8	25,8	120	25	3-3	7-7	50	6,2
KLA 150 (50 PCS)	E12KA-01060100800	185	150	15,5	28,0	127	28	3-3	7-7	50	7,4
KLA 185 (50 PCS)	E12KA-01060100900	240	185	17,8	30,0	132	30	3-3	7-7	50	8,3
KLA 240 (50 PCS)	E12KA-01060101000	300	240	19,3	34,0	145	34	3-3	8-8	50	11,9

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow