Compression connectors with barrier, LMP type

FEATURES & BENEFITS

- tight connector Cu, crimped part as per DIN
- description of cable cross-section, crimping die number on crimped part surface
- cable cross-section change impossible
- not mechanically loaded

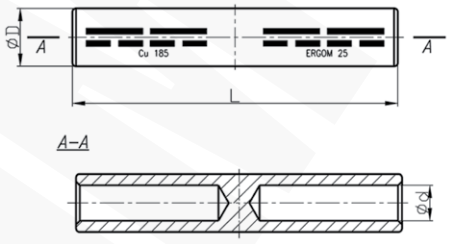

LOGISTIC DATA

Quantity in package [pcs]	10

MECHANICAL DATA

Material	Cu
Surface	uncoated

CERTIFICATES & STANDARDS

Design	DIN 46267 Part 1 – concerns diameters the tubular part

EAC RoHS Compliance REACH Compliance

NOTE!

Sector-shaped conductors (sm) must be rounded with special dies.
Tin version on request.

Type	Index Ergom	Cross-section, rm/ sm [mm²]	d	D	L	Socket code no.	Lz/s	Lz/w	Weight [kg]
LMP 16 (10 PCS)	E11KM-02100100102	16	5,5	8,5	55	8	1 -1	2 - 2	0,2
LMP 25 (10 PCS)	E11KM-02100100202	25	7,0	10,0	55	10	1 -1	2 - 2	0,24
LMP 35 (10 PCS)	E11KM-02100100302	35	8,2	12,5	55	12	1 -1	2 - 2	0,3
LMP 50 (10 PCS)	E11KM-02100100402	50	10,0	14,5	65	14	1 -1	3 - 3	0,5
LMP 70 (10 PCS)	E11KM-02100100502	70	11,5	16,5	65	16	1 -1	3 - 3	0,75
LMP 95 (10 PCS)	E11KM-02100100602	95	13,5	19,0	75	18	2 - 2	4 - 4	1,1
LMP 120 (10 PCS)	E11KM-02100100702	120	15,5	21,0	75	20	2 - 2	4 - 4	1,2
LMP 150 (10 PCS)	E11KM-02100100802	150	17,0	23,5	85	22	2 - 2	4 - 4	1,8
LMP 185 (10 PCS)	E11KM-02100100902	185	19,0	25,5	95	25	2 - 2	4 - 4	2,2
LMP 240 (10 PCS)	E11KM-02100101002	240	21,5	29,0	95	28	2 - 2	-	3,5

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow

Date of publication: 15/12/2023

Graphic project, pictures and all technical data and descriptions in this catalogue are protected by Polish and international copyright laws.
Names and logos used in the content of this catalogue may be trademarks, for which ZAE Ergom Sp. z o.o. has exclusive protection rights.
ZAE ERGOM reserves the right for changes in the assortment and parameters of its products.