


Insulated push-on female connectors, NI

FEATURES & BENEFITS

- female push-on connector with polyamide insulating sleeve, with long Cu sleeve inside, for double crimping
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk, facilitates cable installation
- sleeve colours facilitate cross-section identification
- to operate in wider temperature ranges than terminals with PVC insulation

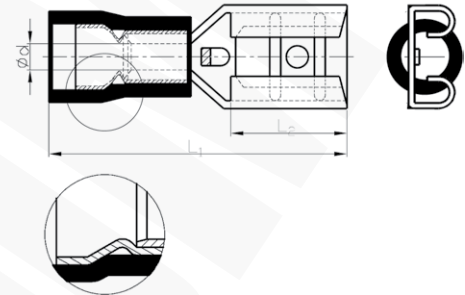

ERC

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyamide 6.6

Material brass

Surface tin-plated

Operating temperature [°C] -30 ÷ +95

NOTE!

Terminals with PC insulation available on request. Terminals on spools - visit www.ergom.com

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
NI 2,8-1/0,5 (100 PCS)	E10KN-03010100101	0,75+1	red	2,8x0,5	1,7	19,0	6,5	0,07
NI 2,8-1/0,8 (100 PCS)	E10KN-03010100201			2,8x0,8				
NI 4,8-1/0,5 (100 PCS)	E10KN-03010100501			6,3x0,8				0,1
NI 4,8-1/0,8 (100 PCS)	E10KN-03010100601			2,8x0,5				
NI 6,3-1/0,8 (100 PCS)	E10KN-03010100901	1,5+2,5	blue	4,8x0,8	2,3	21,0	7,2	0,09
NI 2,8-2,5/0,5 (100 PCS)	E10KN-03010100301			4,8x0,5				0,07
NI 2,8-2,5/0,8 (100 PCS)	E10KN-03010100401			4,8x0,8				
NI 4,8-2,5/0,5 (100 PCS)	E10KN-03010100701			2,8x0,8				0,08
NI 4,8-2,5/0,8 (100 PCS)	E10KN-03010100801	4,8x0,5						
NI 6,3-2,5/0,8 (100 PCS)	E10KN-03010101001	4+6	yellow	6,3x0,8	3,4	21,0	7,2	0,11
NI 6,3-6/0,8 (100 PCS)	E10KN-03010101101			6,3x0,8				0,18
NI 9,5-6/1,2 (100 PCS)	E10KN-03010101201			9,5x1,2				