

Insulated push-on female connectors, NI...PCV type

FEATURES & BENEFITS

- ✓ female push-on connector with polyamide insulating sleeve, with Cu sleeve inside, for double crimping
- ✓ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- ✓ sleeve colours facilitate cross-section identification

LOGISTIC DATA


Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyvinyl chloride (PVC)
 Material brass
 Surface tin-plated
 Operating temperature [°C] -5 ÷ +60

NOTE!

Terminals with PC insulation available on request.

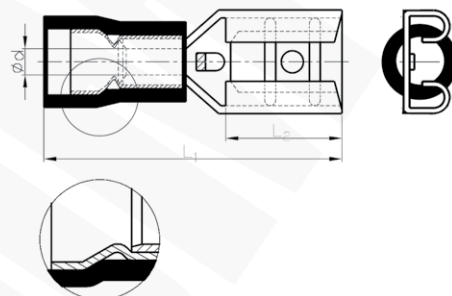

Type	Index Ergom	Cross-section [mm²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
NI 2,8-1/0,5 PCV (100 PCS)	E10KN-03010102501	0,75÷1	red	2,8x0,5	1,7	19,0	6,5	0,07
NI 2,8-1/0,8 PCV (100 PCS)	E10KN-03010102601			2,8x0,8		19,5		
NI 4,8-1/0,5 PCV (100 PCS)	E10KN-03010102901			4,8x0,5			0,08	
NI 4,8-1/0,8 PCV (100 PCS)	E10KN-03010103001			4,8x0,8				21,0
NI 6,3-1/0,8 PCV (100 PCS)	E10KN-03010103401			6,3x0,8		1,5÷2,5	blue	2,3
NI 2,8-2,5/0,5 PCV (100 PCS)	E10KN-03010102701	2,8x0,5	19,5	0,08				
NI 2,8-2,5/0,8 PCV (100 PCS)	E10KN-03010102801	2,8x0,8			0,09			
NI 4,8-2,5/0,5 PCV (100 PCS)	E10KN-03010103101	4,8x0,5						
NI 4,8-2,5/0,8 PCV (100 PCS)	E10KN-03010103201	4,8x0,8	4÷6	yellow	3,4			
NI 6,3-2,5/0,8 PCV (100 PCS)	E10KN-03010103501	6,3x0,8				28,5	12,0	0,26
NI 6,3-6/0,8 PCV (100 PCS)	E10KN-03010103601	9,5x1,2						
NI 9,5-6/1,2 PCV (100 PCS)	E10KN-03010103701							