


Insulated push-on female connectors, NI...B PCV type

FEATURES & BENEFITS

- female push-on connector with polyamide sleeve - low-cost version for less demanding applications, without internal Cu sleeve
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

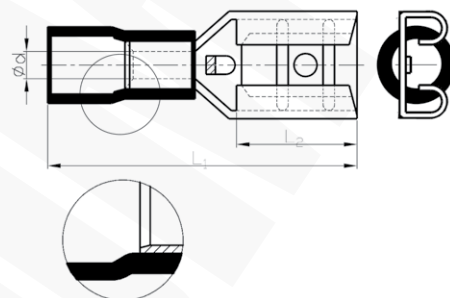

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyvinyl chloride (PCV)

Material brass

Surface tin-plated

Operating temperature [°C] -5 ÷ +60

NOTE!

Terminals with PA and PC insulation available on request.

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]			
NI 2,8-1/0,5 BPCV (100 PCS)	E10KN-03010200101	0,75÷1	red	2,8x0,5	1,7	18,5	6,5	0,04			
NI 2,8-1/0,8 BPCV (100 PCS)	E10KN-03010200201			2,8x0,8							
NI 4,8-1/0,5 BPCV (100 PCS)	E10KN-03010200501			4,8x0,5		19,0			0,05		
NI 4,8-1/0,8 BPCV (100 PCS)	E10KN-03010200601			4,8x0,8							
NI 6,3-1/0,8 BPCV (100 PCS)	E10KN-03010200901			6,3x0,8		20,5				7,2	0,07
NI 2,8-2,5/0,5 BPCV (100 PCS)	E10KN-03010200301			1,5÷2,5		blue				2,8x0,5	2,3
NI 2,8-2,5/0,8 BPCV (100 PCS)	E10KN-03010200401	2,8x0,8									
NI 4,8-2,5/0,5 BPCV (100 PCS)	E10KN-03010200701	4,8x0,5	19,0		0,06						
NI 4,8-2,5/0,8 BPCV (100 PCS)	E10KN-03010200801	4,8x0,8									
NI 6,3-2,5/0,8 BPCV (100 PCS)	E10KN-03010201001	6,3x0,8	20,5				7,2	0,08			
NI 6,3-6/0,8 BPCV (100 PCS)	E10KN-03010201101	4÷6	yellow				6,3x0,8	3,4	23,5	7,2	
NI 9,5-6/1,2 BPCV (100 PCS)	E10KN-03010201201			9,5x1,2		3,3	28,5				12,0