

Fully insulated female push-on connectors in heat-shrink insulation, NCIT type

FEATURES & BENEFITS



female push-on connector with long heat-shrink insulating sleeve with adhesive, with long Cu sleeve inside, for double crimping



heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk



sleeve colours facilitate cross-section identification

LOGISTIC DATA


Quantity in package [pcs]	100
---------------------------	-----

MECHANICAL DATA

Insulation	heat-shrink sleeve
Material	brass
Surface	tin-plated
Operating temperature [°C]	-55 ÷ +125
Shrink temperature [°C]	> 120
Size	6,3x0,8

DIMENSIONS

L ₂	7,2
----------------	-----

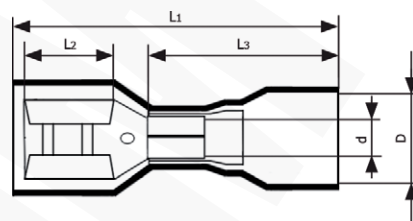

Type	Index Ergom	Cross-section [mm²]	Insulation colour	d	D	L ₁	L ₃	Weight [kg]
NCIT 6,3-1/0,8 (100 PCS)	E09KO-02070600201	0,75 - 1	red	1,7	6,2	30	21	0,07
NCIT 6,3-2,5/0,8 (100 PCS)	E09KO-02070600301	1,5 - 2,5	blue	2,3	6,2	30	21	0,08
NCIT 6,3-6/0,8 (100 PCS)	E09KO-02070600401	4 - 6	yellow	3,4	7,0	32	25	0,1