

Fully insulated piggyback female push-on connectors, NWCI

FEATURES & BENEFITS

- female push-on connector with male push-on connector with long polyamide insulating sleeve, with long Cu sleeve inside, for double crimping
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk, facilitates cable installation
- sleeve colours facilitate cross-section identification
- to operate in wider temperature ranges than terminals with PVC insulation

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyamide 6.6

Material brass

Surface tin-plated

Operating temperature [°C] -30 ÷ +95



Size 6,3x0,8

DIMENSIONS

L₁ 21,5

L₂ 8,0

C 8,2

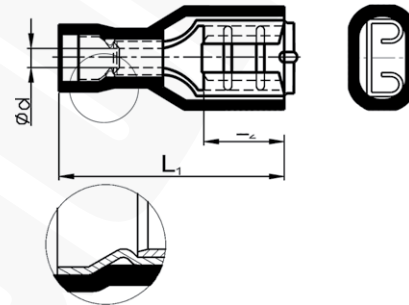

EAC

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	d	Weight [kg]
NWCI 6,3-1/0,8 (100 PCS)	E10KN-03010700101	0,75+1	red	1,7	0,14
NWCI 6,3-2,5/0,8 (100 PCS)	E10KN-03010700201	1,5+2,5	blue	2,3	0,18