

# Insulated piggyback female push-on connectors, NWI...B PCV

## FEATURES & BENEFITS

- female push-on connector with male push-on connector with polyamide insulating sleeve - low-cost version for less demanding applications, without internal Cu sleeve
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification



## LOGISTIC DATA


Quantity in package [pcs] 100

## MECHANICAL DATA

Insulation polyvinyl chloride (PCV)  
 Material brass  
 Surface tin-plated  
 Operating temperature [°C] -5 ÷ +60  
 Size 6,3x0,8

## DIMENSIONS

L<sub>2</sub> 8,0  
 C 8,2

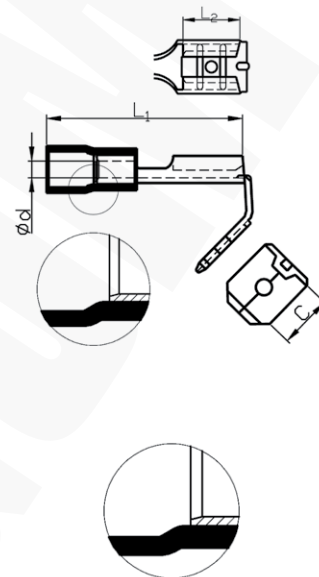

Type	Index Ergom	Cross-section [mm <sup>2</sup> ]	Insulation colour	d	L <sub>1</sub>	Weight [kg]
NWI 6,3-1/0,8 BPCV (100 PCS)	E10KN-03010600101	0,75+1	red	1,7	22,5	0,1
NWI 6,3-2,5/0,8 BPCV (100 PCS)	E10KN-03010600201	1,5+2,5	blue	2,3	22,5	0,11
NWI 6,3-6/0,8 BPCV (100 PCS)	E10KN-03010600301	4+6	yellow	3,4	24,5	0,12