


Insulated male push-on connectors, WI type

FEATURES & BENEFITS

- ✓ male push-on connector with polyamide insulating sleeve, with Cu sleeve inside, for double crimping
- ✓ insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk, facilitates cable installation
- ✓ sleeve colours facilitate cross-section identification
- ✓ to operate in wider temperature ranges than terminals with PVC insulation

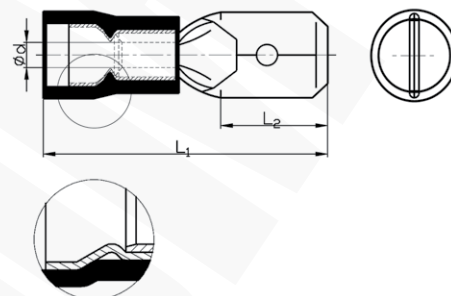

EAC

LOGISTIC DATA

Quantity in package [pcs] 100

MECHANICAL DATA

Insulation polyamide 6.6
 Material brass
 Surface tin-plated
 Operating temperature [°C] -30 ÷ +95

Type	Index Ergom	Cross-section [mm²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]
WI 2,8-1/0,5 (100 PCS)	E10KN-03020100101	0,75÷1	red	2,8x0,5	1,7	19,4	6,5	0,04
WI 2,8-1/0,8 (100 PCS)	E10KN-03020100201			2,8x0,8				0,05
WI 4,8-1/0,5 (100 PCS)	E10KN-03020100301			4,8x0,5		19,9	6,7	0,06
WI 4,8-1/0,8 (100 PCS)	E10KN-03020100401			4,8x0,8				0,07
WI 6,3-1/0,8 (100 PCS)	E10KN-03020100701			6,3x0,8		22,0	7,7	0,09
WI 4,8-2,5/0,5 (100 PCS)	E10KN-03020100501	1,5÷2,5	blue	4,8x0,5	2,3	19,9	6,7	0,08
WI 4,8-2,5/0,8 (100 PCS)	E10KN-03020100601			4,8x0,8				0,09
WI 6,3-2,5/0,8 (100 PCS)	E10KN-03020100801			6,3x0,8		22,0	7,7	0,1
WI 6,3-6/0,8 (100 PCS)	E10KN-03020100901	4÷6	yellow	6,3x0,8	3,4	24,0	7,7	0,16