

Insulated male push-on connectors, WI...PCV type

FEATURES & BENEFITS

- male push-on connector with polyamide insulating sleeve, with long Cu sleeve inside, for double crimping
- insulating sleeve: enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification

LOGISTIC DATA

Quantity in package [pcs] 100


MECHANICAL DATA

Insulation polyvinyl chloride (PCV)

Material brass

Surface tin-plated

Operating temperature [°C] -5 ÷ +60

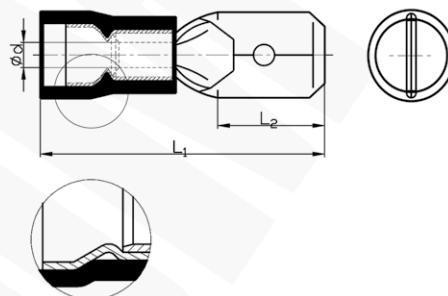

Type	Index Ergom	Cross-section [mm ²]	Insulation colour	Size	d	L ₁	L ₂	Weight [kg]		
WI 2,8-1/0,5 PCV (100 PCS)	E10KN-03020101901	0,75+1	red	2,8x0,5	1,7	18,7	6,5	0,04		
WI 2,8-1/0,8 PCV (100 PCS)	E10KN-03020102001			2,8x0,8						
WI 4,8-1/0,5 PCV (100 PCS)	E10KN-03020102101			4,8x0,5		19,2				
WI 4,8-1/0,8 PCV (100 PCS)	E10KN-03020102201			4,8x0,8						
WI 6,3-1/0,8 PCV (100 PCS)	E10KN-03020102501			6,3x0,8		20,8			7,6	0,08
WI 4,8-2,5/0,5 PCV (100 PCS)	E10KN-03020102301			1,5+2,5		blue			4,8x0,5	2,3
WI 4,8-2,5/0,8 PCV (100 PCS)	E10KN-03020102401	4,8x0,8	6,7							
WI 6,3-2,5/0,8 PCV (100 PCS)	E10KN-03020102601	6,3x0,8	20,8		7,6		0,1			
WI 6,3-6/0,8 PCV (100 PCS)	E10KN-03020102701	4+6	yellow	6,3x0,8	3,4	24,0	7,6	0,16		