

# Insulated male push-on connectors in heat-shrink insulation, WIT type

## FEATURES & BENEFITS

- male push-on connector with heat-shrink insulating sleeve with adhesive, with long Cu tube inside, for double crimping
- heat-shrink insulation; enhances resistance to vibrations, mitigates short-circuit risk
- sleeve colours facilitate cross-section identification




## LOGISTIC DATA

Quantity in package [pcs] 100

## MECHANICAL DATA

Insulation	heat-shrink sleeve
Material	brass
Surface	tin-plated
Operating temperature [°C]	-55 ÷ +125
Shrink temperature [°C]	>120
Size	6,3x0,8

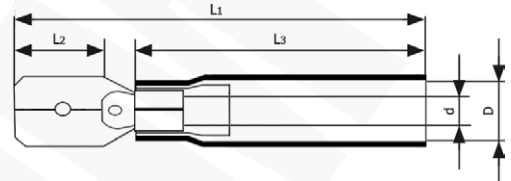

## DIMENSIONS

L<sub>2</sub> 7,7

Type	Index Ergom	Cross-section [mm <sup>2</sup> ]	Insulation colour	d	D	L <sub>1</sub>	L <sub>3</sub>	Weight [kg]
WIT 6,3-1/0,8 (100 PCS)	E09KO-02070500201	0,75 - 1	red	1,7	4,8	31,0	21,0	0,08
WIT 6,3-2,5/0,8 (100 PCS)	E09KO-02070500301	1,5 - 2,5	blue	2,3	5,8	31,0	21,0	0,09
WIT 6,3-6/0,8 (100 PCS)	E09KO-02070500401	4 - 6	yellow	3,4	7,0	34,0	25,0	0,11