

Branch clamps for uninsulated overhead power lines, ZLN ... /2A type

FEATURES & BENEFITS



Al clamps for uninsulated overhead lines



facilitate branching or connection of Al or ACSR overhead line cable

LOGISTIC DATA

Quantity in package [pcs] 1

APPLICATION


Connecting of unstrained uninsulated overhead line wires, made of aluminium (Al) or steel and aluminium (ACSR). Contact surfaces of clamps are grooved, which facilitates removing oxide layers from wire surfaces and reduction of the transition resistance.

MECHANICAL DATA

Material

Body – Aluminium (PA-38 alloy);
Screws – Galvanized steel;
Nuts – Galvanized steel

Number of screws [pcs] 2

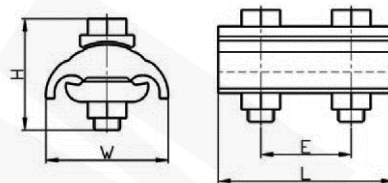

Type	Index Ergom	Cross-section, rm/sm [mm ²]	L	E	H	W	Screw	Weight [kg]
ZLN 425/2A	E14KI-04010100101	4+25	39	20	30	27	M6x25	0,05
ZLN 635/2A	E14KI-04010100201	6+35	41	21	36	31	M8x30	0,07
ZLN 1050/2A	E14KI-04010100301	10+50	46	24	36	35	M8x30	0,09
ZLN 1695/2A	E14KI-04010100401	16+95	53	28	47	47	M10x40	0,17
ZLN 16150/2A	E14KI-04010100501	16+150	60	31	57	54	M10x50	0,22