


FEATURES & BENEFITS

- replaceable die for system K22
- side and front crimping head "inlet"
- auxiliary equipment can be mounted to: cut off cables, cut out holes in steel plates, cut off TSE rails, make elliptical holes in TSE rails
- pressure force: 60 kN

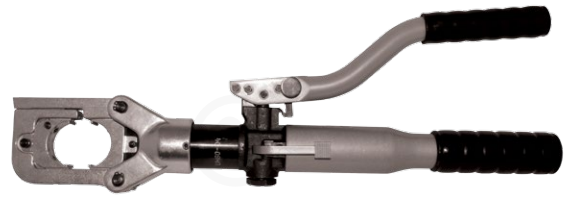

LOGISTIC DATA

Type	UH 60
Index Ergom	E06PZ-05130001000
Weight [kg]	3,5

MECHANICAL DATA

Die type	K22
Crimping force [kN]	60
Working pressure [MPa]	70
Piston stroke [mm]	42
Crimping range	6 ÷ 300

CRIMPING

Terminal group	Cable cross-section [mm ²]	Crimping shape
Al DIN	10-185	hexagon
Al-c	16-240	hexagon
Al-g	25-150	hexagon
Cu DIN	16-240	hexagon
Cu EKO - KREo, LE	95-240	hexagon
H...ERHN, HI...ERHL, HIG	16-120	trapezoid
KOI, KWI, KII, KLI, NI, WI, GI, NCI, WCI, GCI (PA, PC, PCV)	10-120	oval
MJPB	6-35	hexagon
MJPT	16-95	hexagon
Standard Cu	16-300	hexagon
ZLA	50-70	crimping
sm	300	round forming

SET CONTAINS

Quantity included [pcs.]	Comment
UH 60	1 crimping tool
UH-K22	1 adapter die system, 22
UH-N40	1 cutting knives
UH-W60	1 -
Metal case	1 -
Instruction manual	