

Earthing clamps, OU 18-60, OU 60-120 type

FEATURES & BENEFITS



stainless-steel ties



clamp for direct mounting of up to 16 mm² cross-section cords



easy installation and guarantee of good electric and mechanical connection

Earthing clamps are clenched on 18-165 mm pipes with 2 M6 screws. One of the screws works also as a clamp to copper wires of up to 16 mm² cross-section. Earthing clamps are used for equalizing potential in buildings, ensuring electric shock protection works properly.


MECHANICAL DATA

Material stal nierdzewna

Cable cross-section [mm²] 16

CERTIFICATES & STANDARDS

Standards EN 60947-7-2; Safety sign "B"

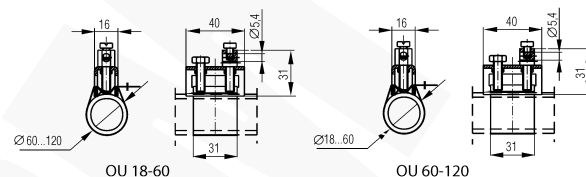

Type	Index Ergom	Pipe diameter range [mm]	Quantity in package [pcs]	Weight [g]
OU 18-60 (8 PCS)	R33RA-04030100103	18÷60	8	424
OU 60-120 (4 PCS)	R33RA-04030100203	60÷120	4	232