

## FEATURES & BENEFITS



easy installation of RKR and WTE corrugated conduit holders

## APPLICATION


For RKR flexible tube fixing

## MECHANICAL DATA


Colour	grey RAL 7035
Material	polyamide 6, RoHS
Operating temp. [°C]	-20 ÷ +120
Assembly	URE holders are screwed to the RN box door rail directly with Ø5.5 x 12 mm tapping screws or to an enclosure wall, with a WUR 1 bracket (sizes 16 and 29) or WUR 2 bracket (sizes 36 and 48).

## DIMENSIONS

W	5
---	---

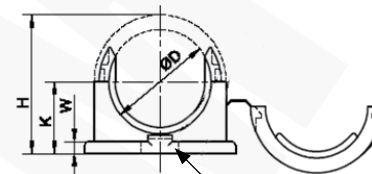

Gap on cable ties. (Max tie width 9 mm)

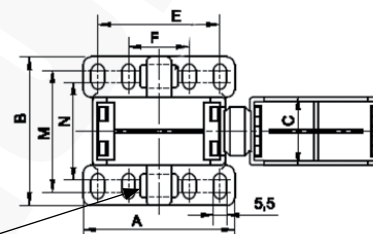

Gap on cable ties. (Max tie width 9 mm)

Type	Index Ergom	RKR tube, dimension D [mm]	A	B	C	D	E	F	H	K	M	N	Quantity in package [pcs]
URE 16 (10 PCS)	E03DK-07500020501	21,2	37	44	14	21,2	25	-	34	18,5	33	25	10
URE 29 (10 PCS)	E03DK-07500020701	34,5	44,7	44	14	34,5	25	-	47,5	25	33	25	10
URE 36 (10 PCS)	E03DK-07500020801	42,5	62	61	28	42,5	50	25	56,5	29	50	40	10
URE 48 (5 PCS)	E03DK-07500020901	54,5	67,8	61	28	54,5	50	25	69	35	50	40	5