

Aluminium thin-walled tubular cable lugs, 2KAm type

FEATURES & BENEFITS

- ☒ thin-walled ring cable lug Al
- ☒ description of cable cross-section and cable lug size on palm surface
- ☒ low-cost design only for much less demanding applications, not recommended for new installations
- ☒ does not contain grease ensuring gas-tight connection in crimped part - grease available separately

MECHANICAL DATA


Material	Al
Surface	uncoated

CERTIFICATES & STANDARDS

Design	thin-walled
--------	-------------

NOTE!

Sector shaped conductors (sm) must be rounded with special dies.

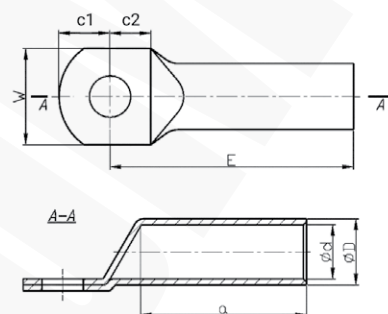

Type	Index Ergom	Cross-section, re/se [mm²]	Cross-section, rm/sm [mm²]	d	D	c1	c2	a	E	W	Screw hole	Socket code	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
2KAM 16/6 (100 PCS)	E12KA-01050100100	25	16	5,2	9,2	11	10	24	46	15,5	M6	10	2	4	100	0,66
2KAM 16/6 (10 PCS)	E12KA-01050100102										M8				10	0,07
2KAM 16/8 (100 PCS)	E12KA-01050100200										M8				100	0,65
2KAM 16/8 (10 PCS)	E12KA-01050100202										M10				10	0,07
2KAM 16/10 (100 PCS)	E12KA-01050100300										M10				100	0,71
2KAM 16/10 (10 PCS)	E12KA-01050100302										M10				10	0,08
2KAM 25/6 (100 PCS)	E12KA-01050100400	35	25	6,4	10,4	11	10	26	49	17,5	M6	11	2	4	100	0,82
2KAM 25/6 (10 PCS)	E12KA-01050100402										M8				10	0,09
2KAM 25/8 (100 PCS)	E12KA-01050100500										M8				100	0,78
2KAM 25/8 (10 PCS)	E12KA-01050100502										M10				10	0,08
2KAM 25/10 (100 PCS)	E12KA-01050100600										M10				100	0,82
2KAM 25/10 (10 PCS)	E12KA-01050100602										M10				10	0,09
2KAM 25/12 (100 PCS)	E12KA-01050100700	50	35	7,6	12,0	14	13	27	56	21,5	M12	12	2	4	100	0,81
2KAM 25/12 (10 PCS)	E12KA-01050100702										M12				10	0,09
2KAM 35/6 (100 PCS)	E12KA-01050100800										M6				100	1,1
2KAM 35/6 (10 PCS)	E12KA-01050100802										M8				10	0,11
2KAM 35/8 (100 PCS)	E12KA-01050100900										M8				100	1,1
2KAM 35/8 (10 PCS)	E12KA-01050100902										M10				10	0,11
2KAM 35/10 (100 PCS)	E12KA-01050101000	50	35	7,6	12,0	14	13	27	56	23,5	M10	12	2	4	100	1,15
2KAM 35/10 (10 PCS)	E12KA-01050101002										M10				10	0,12
2KAM 35/12 (100 PCS)	E12KA-01050101100										M12				100	1,17
2KAM 35/12 (10 PCS)	E12KA-01050101102										M12				10	0,12
2KAM 35/14 (100 PCS)	E12KA-01050101200										M14				100	1,24
2KAM 35/14 (10 PCS)	E12KA-01050101202										M14				10	0,13
2KAM 35/16 (100 PCS)	E12KA-01050101300	50	35	7,6	12,0	14	13	27	56	23,5	M16	12	2	4	100	1,23
2KAM 35/16 (10 PCS)	E12KA-01050101302										M16				10	0,13

Type	Index Ergom	Cross-section, re/se [mm²]	Cross-section, rm/sm [mm²]	d	D	c1	c2	a	E	W	Screw hole	Socket code	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
2KAM 50/8 (100 PCS)	E12KA-01050101400	70	50	9,2	14,0	11	10	63	21,5	34	M8	14	2	5	100	1,65
2KAM 50/8 (10 PCS)	E12KA-01050101402										M8				10	0,17
2KAM 50/10 (100 PCS)	E12KA-01050101500										M10				100	1,7
2KAM 50/10 (10 PCS)	E12KA-01050101502										M10				10	0,17
2KAM 50/12 (100 PCS)	E12KA-01050101600										M12				100	1,5
2KAM 50/12 (10 PCS)	E12KA-01050101602										M12				10	0,15
2KAM 50/14 (100 PCS)	E12KA-01050101700										M14				100	1,55
2KAM 50/14 (10 PCS)	E12KA-01050101702										M14				10	0,16
2KAM 50/16 (100 PCS)	E12KA-01050101800										M16				100	1,5
2KAM 50/16 (10 PCS)	E12KA-01050101802										M16				10	0,15
2KAM 70/8 (100 PCS)	E12KA-01050101900	95	70	10,6	15,5	11	10	67	23,5	36	M8	16	3	5	100	2,15
2KAM 70/8 (10 PCS)	E12KA-01050101902										M8				10	0,22
2KAM 70/10 (100 PCS)	E12KA-01050102000										M10				100	2,15
2KAM 70/10 (10 PCS)	E12KA-01050102002										M10				10	0,22
2KAM 70/12 (100 PCS)	E12KA-01050102100										M12				100	2,1
2KAM 70/12 (10 PCS)	E12KA-01050102102										M12				10	0,21
2KAM 70/14 (100 PCS)	E12KA-01050102200										M14				100	2
2KAM 70/14 (10 PCS)	E12KA-01050102202										M14				10	0,2
2KAM 70/16 (100 PCS)	E12KA-01050102300										M16				100	2,1
2KAM 70/16 (10 PCS)	E12KA-01050102302										M16				10	0,21
2KAM 95/8 (50 PCS)	E12KA-01050102400	120	95	12,8	18,0	12	13	83	25,5	47	M8	18	3	6	50	1,6
2KAM 95/8 (10 PCS)	E12KA-01050102402										M8				10	0,32
2KAM 95/10 (50 PCS)	E12KA-01050102500										M10				50	1,6
2KAM 95/10 (10 PCS)	E12KA-01050102502										M10				10	0,32
2KAM 95/12 (50 PCS)	E12KA-01050102600										M12				50	1,6
2KAM 95/12 (10 PCS)	E12KA-01050102602										M12				10	0,32
2KAM 95/14 (50 PCS)	E12KA-01050102700										M14				50	1,54
2KAM 95/14 (10 PCS)	E12KA-01050102702										M14				10	0,31
2KAM 95/16 (50 PCS)	E12KA-01050102800										M16				50	1,5
2KAM 95/16 (10 PCS)	E12KA-01050102802										M16				10	0,3
2KAM 120/8 (50 PCS)	E12KA-01050102900	150	120	14,3	19,6	17	16	88	28,5	50	M8	19	3	6	50	2
2KAM 120/8 (10 PCS)	E12KA-01050102902										M8				10	0,4
2KAM 120/10 (50 PCS)	E12KA-01050103000										M10				50	2
2KAM 120/10 (10 PCS)	E12KA-01050103002										M10				10	0,4
2KAM 120/12 (50 PCS)	E12KA-01050103100										M12				50	1,9
2KAM 120/12 (10 PCS)	E12KA-01050103102										M12				10	0,38
2KAM 120/14 (50 PCS)	E12KA-01050103200										M14				50	2,12
2KAM 120/14 (10 PCS)	E12KA-01050103202										M14				10	0,43
2KAM 120/16 (50 PCS)	E12KA-01050103300										M16				50	2,1
2KAM 120/16 (10 PCS)	E12KA-01050103302										M16				10	0,42
2KAM 120/20 (50 PCS)	E12KA-01050103400	185	150	16,2	22,0	20	21	99	32,0	55	M20	22	3	6	50	2,2
2KAM 120/20 (10 PCS)	E12KA-01050103402										M20				10	0,44
2KAM 150/10 (50 PCS)	E12KA-01050103500										M10				50	2,6
2KAM 150/10 (10 PCS)	E12KA-01050103502										M10				10	0,52
2KAM 150/12 (50 PCS)	E12KA-01050103600										M12				50	2,6
2KAM 150/12 (10 PCS)	E12KA-01050103602										M12				10	0,52
2KAM 150/14 (50 PCS)	E12KA-01050103700										M14				50	2,9
2KAM 150/14 (10 PCS)	E12KA-01050103702										M14				10	0,58
2KAM 150/16 (50 PCS)	E12KA-01050103800										M16				50	2,7
2KAM 150/16 (10 PCS)	E12KA-01050103802										M16				10	0,54
2KAM 150/20 (50 PCS)	E12KA-01050103900	240	185	17,8	24,0	20	21	60	109	34,5	M20	23	3	6	50	2,95
2KAM 150/20 (10 PCS)	E12KA-01050103902										M20				10	0,59
2KAM 185/10 (50 PCS)	E12KA-01050103910										M10				50	3,3
2KAM 185/10 (10 PCS)	E12KA-01050103912										M10				10	0,66
2KAM 185/12 (50 PCS)	E12KA-01050104000										M12				50	3,75
2KAM 185/12 (10 PCS)	E12KA-01050104002										M12				10	0,67
2KAM 185/14 (50 PCS)	E12KA-01050104100										M14				50	3,55
2KAM 185/14 (10 PCS)	E12KA-01050104102										M14				10	0,71
2KAM 185/16 (50 PCS)	E12KA-01050104200										M16				50	3,45
2KAM 185/16 (10 PCS)	E12KA-01050104202										M16				10	0,69
2KAM 185/20 (50 PCS)	E12KA-01050104300										M20				50	3,25
2KAM 185/20 (10 PCS)	E12KA-01050104302										M20				10	0,65

Type		Index Ergom	Cross-section, re/se [mm²]	Cross-section, rm/sm [mm²]	d	D	c1	c2	a	E	W	Screw hole	Socket code	Lz/s	Lz/w	Quantity in package [pcs]	Weight [kg]
2KAM 240/10	(50 PCS)	E12KA-01050104400	300	240	20,2	28,2	20	21	64	115	40,0	M10	28	3	8	50	5,3
2KAM 240/10	(10 PCS)	E12KA-01050104402										10				1,06	
2KAM 240/12	(50 PCS)	E12KA-01050104500										M12				50	5
2KAM 240/12	(10 PCS)	E12KA-01050104502														10	1
2KAM 240/14	(50 PCS)	E12KA-01050104600										M14				50	5,2
2KAM 240/14	(10 PCS)	E12KA-01050104602														10	1,04
2KAM 240/16	(50 PCS)	E12KA-01050104700										M16				50	5,2
2KAM 240/16	(10 PCS)	E12KA-01050104702														10	1,04
2KAM 240/20	(50 PCS)	E12KA-01050104800										M20				50	5,2
2KAM 240/20	(10 PCS)	E12KA-01050104802														10	1,04

Lz/s - Number of crimping - wide, Lz/w - Number of crimping - narrow