

Heat shrink tubes, TGR,TGRK type

FEATURES & BENEFITS

- thick-walled heat-shrink conduits with and without adhesive
- enhanced mechanical and electric strength
- hot melt adhesive ensures very good insulation tightness in humid environments
- resistant to UV and halogen-free

Thickened sleeves with and without adhesive.

MECHANICAL DATA


Material	TGR - cross linked polyolefin TGRK - cross linked polyolefin with hot melt adhesive
Halogen-free	yes
UV Resistance	yes
Recommended shrinking temperature [°C]	100 ÷ 125
Operating temperature [°C]	-40 ÷ +125
Shrinkage factor	2:1 do 3:1
Colour	black

ELECTRICAL DATA

Breakdown strength [kV/mm]	12
-----------------------------------	----

DIMENSIONS

Length [m]	1
-------------------	---

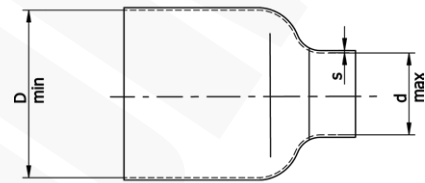

Type	Index Ergom	Inside diameter on delivery D [mm]	Inside diameter in full shrinkage d [mm]	Wall thickness on full shrinkage - s [mm]	Quantity in package [pcs]
TGR 9/3 (10 PCS)	E05ME-01020100103	9	3	1,5	10
TGR 12/4 (10 PCS)	E05ME-01020100203	12	4	1,8	10
TGR 18/6 (10 PCS)	E05ME-01020100303	18	6	2,0	10
TGR 25/10 (10 PCS)	E05ME-01020100403	32	9	2,5	10
TGR 32/12 (10 PCS)	E05ME-01020100503	34	12	2,6	10
TGR 40/16 (10 PCS)	E05ME-01020100603	39	16	2,7	10
TGR 52/20 (10 PCS)	E05ME-01020100703	50	20	2,7	10
TGR 63/27 (5 PCS)	E05ME-01020100803	70	23	2,7	5
TGR 80/35 (5 PCS)	E05ME-01020100903	93	30	3,0	5
TGR 103/35 (5 PCS)	E05ME-01020101003	103	35	3,0	5
TGR 132/58 (5 PCS)	E05ME-01020101103	132	58	3,2	5
TGRK 9/3 (10 PCS)	E05ME-01020200103	9	3	1,5	10
TGRK 12/4 (10 PCS)	E05ME-01020200203	12	4	1,8	10
TGRK 18/6 (10 PCS)	E05ME-01020200303	18	6	2,0	10
TGRK 25/10 (10 PCS)	E05ME-01020200403	32	9	2,5	10
TGRK 32/12 (10 PCS)	E05ME-01020200503	34	12	2,6	10
TGRK 40/16 (10 PCS)	E05ME-01020200603	39	16	2,7	10
TGRK 52/20 (10 PCS)	E05ME-01020200703	50	20	2,7	10
TGRK 63/27 (5 PCS)	E05ME-01020200803	70	23	2,7	5
TGRK 80/35 (5 PCS)	E05ME-01020200903	93	30	3,0	5
TGRK 103/35 (5 PCS)	E05ME-01020201003	103	35	3,0	5
TGRK 132/58 (5 PCS)	E05ME-01020201103	132	58	3,2	5

ERGOM[®]

Date of publication: 19/3/2024

Graphic project, pictures and all technical data and descriptions in this catalogue are protected by Polish and international copyright laws. Names and logos used in the content of this catalogue may be trademarks, for which ZAE Ergom Sp. z o.o. has exclusive protection rights. ZAE ERGOM reserves the right for changes in the assortment and parameters of its products.